

XPOWER

QUICKSTART GUIDE

MANUAL ▶



CONTACT US ▶



SRM GmbH | Rudolf-Schulten-Str. 6 | 52428 Juelich | Germany

SAFETY & WARNINGS

NOTE

Instruction manuals in other languages are available for download - see last page for link.

WARNING - TO AVOID SERIOUS INJURIES

Be sure to follow the instructions provided in this quick start guide when installing the product. This quick start guide is designed only for experienced cyclists who are familiar with the function of clipless pedals. The X-Power pedals are designed so that you release them only when you intend to release. They are not designed to release automatically at times such as when falling off the bicycle.

If you are not familiar with clipless pedals see the full X-Power manual. A link is available on the last page of this guide. If you have any doubt when installing the X-Power pedals, we recommend that you seek assistance from an authorized retailer or refer to the support page on www.srm.de.

Incorrect installation of the X-Power pedals may result in damage not covered by product warranty, serious injury or death. Please familiarize yourself with your new pedals before riding on the road. Practice engaging and disengaging, first at a standstill and then while riding in a safe location.

Weight limit: X-Power pedals are designed and optimized for use by cyclists up to 120 kg (265 lbs).

Classification for bicycle usage according to international standard ASTM F2043-13 for the X-Power pedal is rated category 3: This is a set of conditions for operation of a bicycle that includes Condition 1 and Condition 2 as well as rough trails, rough unpaved roads, and rough terrain and unimproved trails that require technical skills. Jumps and drops are intended to be less than 61cm (24").



3

PEDAL CATEGORY

For more info and explanations on all bicycle usage conditions visit our webpage www.srm.de.

WARRANTY

SRM X-Power PowerMeter are warranted to be free from defects in materials or workmanship for two years from the date of purchase. Within this period, SRM will, at its option, repair or replace any components that fail in normal use. Such repairs or replacement will be made at no charge to the original owner/customer for parts or labour, provided that the customer shall be responsible for any necessary transportation cost. Further information and exceptions for which the guarantee does not apply can be found at www.srm.de/support/warranty/

Additionally, SRM reserves the right to refuse warranty claims against products or services that it deems fraudulent. The SRM PowerMeter is defined as: shaft, pedal-body, rechargeable battery, internal electronics, seals, covers.

DECLARATION OF CONFORMITY

This device has been tested and found to comply with part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

(1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and the receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/TV technician for help.

Operation is subjected to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: Modification to this product will void the user's authority to operate this equipment.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

INTRODUCTION

Congratulations on owning a pair of X-Power PowerMeter pedals!
Getting started is easy:

- Charge and install you pedals on your bike
- Download the app to configure for your bike (no tools needed)
- Go for a ride with X-Power!

TECHNICAL SPECIFICATIONS

BATTERY TYPE	70mAh rechargeable Lithium Polymer battery
BATTERY LIFE	Up to 30 hours of riding time
OPERATING TEMPERATURE	From -20°C to +60°C (-4°F to 140°F)
CHARGING TEMPERATURE	From +10°C to +45°C (50°F to 113°F)
WIRELESS FREQUENCY PROTOCOL	ANT+® 2.4GHz @ 4dbm nominal Bluetooth® 2.4GHz @ 4dbm nominal
WEIGHT	345g per pair (not including cleats)

CHARGING THE PEDALS


Snap the charge adapter onto the charge port on the pedal shaft.

- Charging: **red blinking**
- Charged: **green blinking**
- Cadence: **yellow blinking**

Charge time: approx. 3 hours to 100%

Activate pedals after charging by turning them.

For information on connecting the X-Power pedals via ANT+™ or Bluetooth®, please refer to the manual online.

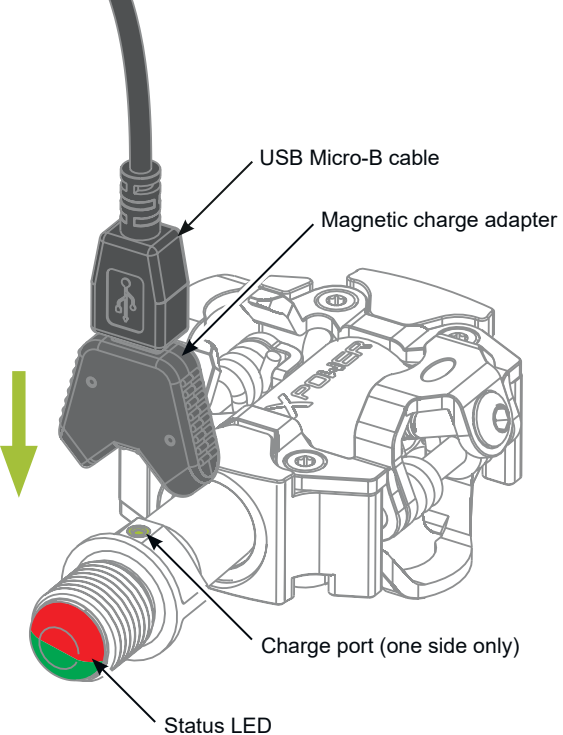


INSTALLATION

Apply grease to the pedal threads. Use a **15 mm** open end wrench (width >6 mm) to install the pedals into your crankset. Recommended min. torque **30Nm (22 lbf-ft)**.

NOTE

Do not use a cone wrench as it will damage the charging port.

For more information on how to install the cleats and how to adjust the spring tension of the pedals see the manual.

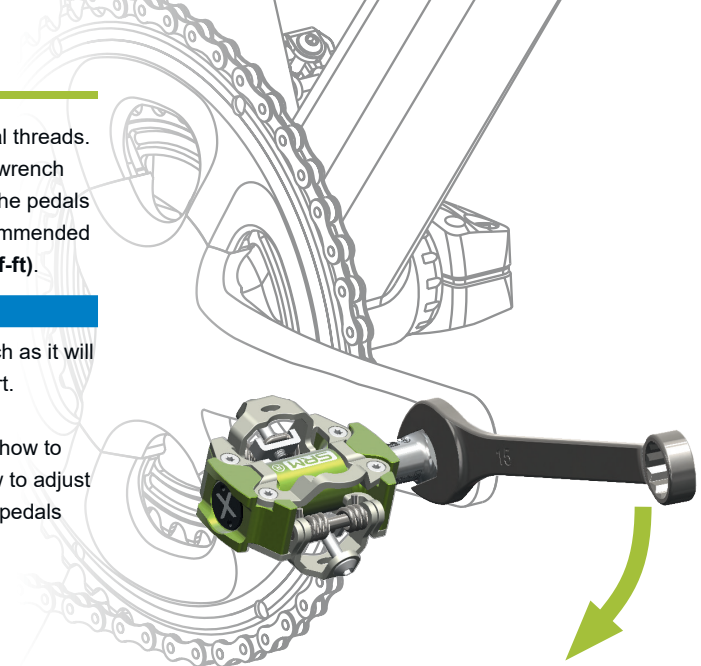

X-POWER APP

Download the app to align and calibrate the X-Power pedals before your first ride.

All other app functions can be found in the online manual.

